

ELECTRONIC TIME FUSE M02

- High precision of timing
- High reliability
- Easy to use



O
P
E
K



Description


Electronic time fuse (UTE M02) is used to complete special (destructive, illumination, smoke, propaganda and cluster) artillery ammunition of 105 ÷ 155 mm caliber.

UTE M02 is based on the up-to-date microprocessor technology. Set time entering is done by contact with the timing device.

Two-way communication with the timing device enables checking of the entered set time.

Technical characteristics

Type.....	Electronic time fuse UTE M02
Ammunition caliber.....	105 ÷ 155 mm
Type of ammunition.....	illumination, smoke, cluster, propaganda, destructive
High safety	three levels of protection
Muzzle safety distance.....	> 400 calibers
Required set-back for arming.....	2000 g ÷ 25000 g
Required rotation for arming.....	2000 ÷ 25000 o/min
Settable time range.....	3.1 ÷ 199.9 s
Timing step.....	0.1 s
Accuracy of the timing.....	± 0.05 s
Working temperature range.....	-30°C ÷ +55°C
Maximum time from timing to firing.....	7 min
Shelf life.....	10 years min.

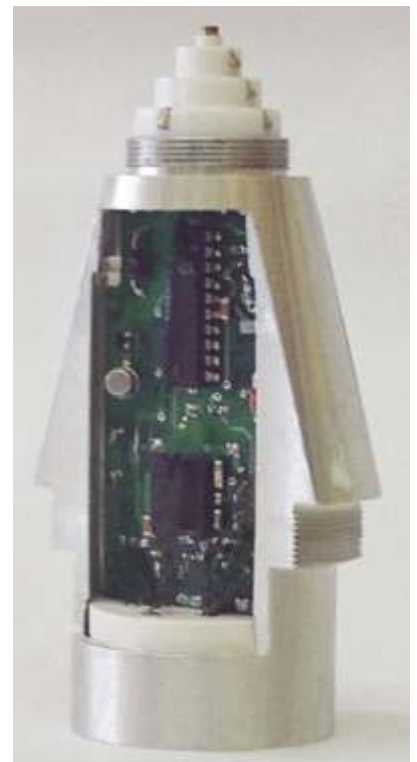

Ei Opek
a.d. Niš

www.eiopek.co.rs / eiopek.a.d@neobee.net

Serbia, 18 000 Nis
80-82 Sv.Cara Konstantina bul.
tel / fax +381 18 550 957
tel +381 18 550 916
+381 18 207 320
+381 18 207 321